


Industrial Grade, Center Cut Cutters



END VIEW


- General plant maintenance tool
- Drop-forged, precision ground, alloy tool steel jaws with center-cut blades
- Cuts soft, medium, or hard materials
- Maximum hardness of material to be cut:
Brinell 455/Rockwell C48
- Lockplate keeps jaws from loosening
- Toggle joints turn 50 lbs. hand pressure to 4000 lbs. cutting pressure
- Screw-type adjustment realigns edges
- Steel handles with rubber grips

Cat No.	UPC No.	Approx. Weight		Length		Soft and Medium Hard Materials (Up to Brinell 300, Rockwell C31)		Hard Materials (Up to Brinell 455, Rockwell C48)		Replacement Cutterhead Cat. No. UPC No.	
						Inch	mm	Inch	mm		
		lbs	k	Inch	mm					Inch	mm
1490MC	037103913777	2 3/4	1	14	356	5/16	8	3/16	5	1413C	037103913456
0090MC	037103905529	3 1/2	2	18	457	3/8	10	1/4	6	0013C	037103904850
0190MC	037103907134	5 1/4	3	24	610	7/16	11	5/16	8	0113C	037103906205
0290MC	037103908094	8 1/2	4	30	762	1/2	13	3/8	10	0213C	037103907578
0390MC	037103909336	12 7/8	6	36	914	9/16	14	7/16	11	0313C	037103908599
0590MC	037103910790	17 1/8	8	42	1067	11/16	18	1/2	13	0513C	037103909930

DANGER

Never use any H.K. Porter cutters on energized circuits, wire, or cable.

Center Cut Cutters

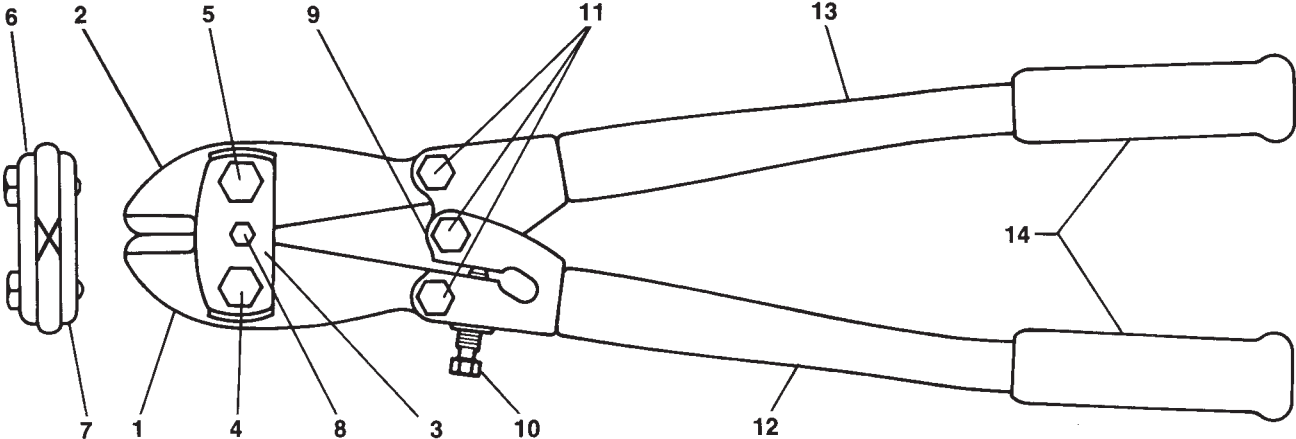

Parts for 0190MC

Overall Length: 24" (610 mm)

Item ...	Part	
No.	No.	Description
.....	0113C	Cutterhead
.....	0112C	Jaws, Pair
.....	0124	Cutterhead less Jaws
.....	0115MS	Handles, Pair
1	0111C	Jaw, Left
2	0110C	Jaw, Right
3	0156	Lockplate
4	0135	Bolt, Right Thread
5	0136	Bolt, Left Thread
6	0120	Strap, Top
7	0121	Strap, Bottom
8	0257	Screw Lockplate
9	0184	Bushing, Handle
10	0138M	Screw, Adjusting
11	0127MS	Bolt and Nut
12	0106MS	Handle, Left
13	0105MS	Handle Right
14	0180M	Grip, Rubber

NOTE: ALL HANDLES ARE SUPPLIED WITH CONNECTING BOLTS AND NUTS