


Small CleanFoam® Swab with Flexible Tip

CleanFoam® Series

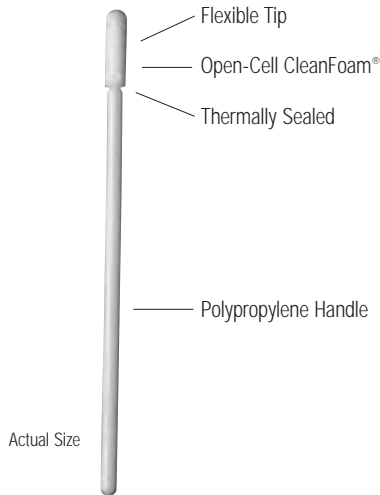

Description

The Small CleanFoam® Swab with Flexible Tip is an excellent general-purpose swab for cleaning small and confined areas. Its laundered CleanFoam® head possesses good capacity and cushioning. A compact, rigid handle and flexible internal head tip provide controlled support.

Features

- Laundered polyurethane CleanFoam® head over flexible tip
- 100 ppi open-cell structure
- Compact, light green polypropylene handle
- Thermally bonded head
- Soft and nonabrasive

Benefits

- Low nonvolatile residue
- Low particle generation
- Excellent sorbency
- No contaminating adhesives
- Good chemical resistance

Applications

- Cleaning with solvents such as IPA
- Applying lubricants and other liquids
- Removing excess materials

Products

TX Number	Description	Packaging
TX741B	Small CleanFoam® Swab with Flexible Tip	Bag-Within-A-Bag®; 500 swabs/bag; 5 inner bags of 100 swabs; 5 bags/case



North America
 650 East Crescent Avenue
 Upper Saddle River, NJ 07458
 Tel (800) TEXWIPE ext 120
 (201) 327-9100 ext 120
 Fax (201) 327-5945
www.texwipe.com
info@texwipe.com

Europe/Middle East
 Skejby Nordlandsvej 307
 DK-8200 Århus N
 Denmark
 Tel +45 87 400 220
 Fax +45 87 400 222

Asia/Pacific
 50 Tagore Lane
 #02-01/02/03 Markono
 Distri Centre
 Singapore 787494
 Tel +65 6468 9433
 Fax +65 6468 6772

DS-741B .1M ©2002 ITW Texwipe Printed in USA
 Effective: December 2001

Distributed by:

All-Spec Industries

Wilmington, NC

Ph: 800-537-0351

Fx: 800-379-9903

Email: sales@all-spec.com

Web: www.all-spec.com

Swabs CF 741B-19

Small CleanFoam® Swab with Flexible Tip

TX741B

Physical Characteristics

Head material	100 ppi open-cell CleanFoam®
Head width	3.4 mm (0.134")
Head thickness	3.0 mm (0.118")
Head length	10.5 mm (0.413")
Handle material	Polypropylene
Handle width	2.4 mm (0.094")
Handle thickness	2.4 mm (0.094")
Handle length	57.5 mm (2.264")
Total swab length	68.0 mm (2.677")
Head bond	Thermal
Handle color	Light green
Design notes	Flexible head tip; compact handle

Contamination Characteristics

Property	Measurement	Test Method*
Nonvolatile residue		
IPA extractant	< 0.01 mg/swab	TM10: Procedure for Determining the Nonvolatile Residue (NVR) Extractable from Swabs in a Given Solvent
Ions		TM12: The Determination of Ions in Wipers and Other Materials by Capillary Ion Analysis (CIA)
Chloride	0.06 µg/swab	
Sulfate	0.06 µg/swab	
Nitrate	0.04 µg/swab	
Phosphate	0.07 µg/swab	
Fluoride	0.01 µg/swab	
Potassium	0.09 µg/swab	
Calcium	0.07 µg/swab	
Sodium	0.07 µg/swab	
Magnesium	0.01 µg/swab	

*Test procedures available upon request.