


# Rectangular Head Swab

Foam Series

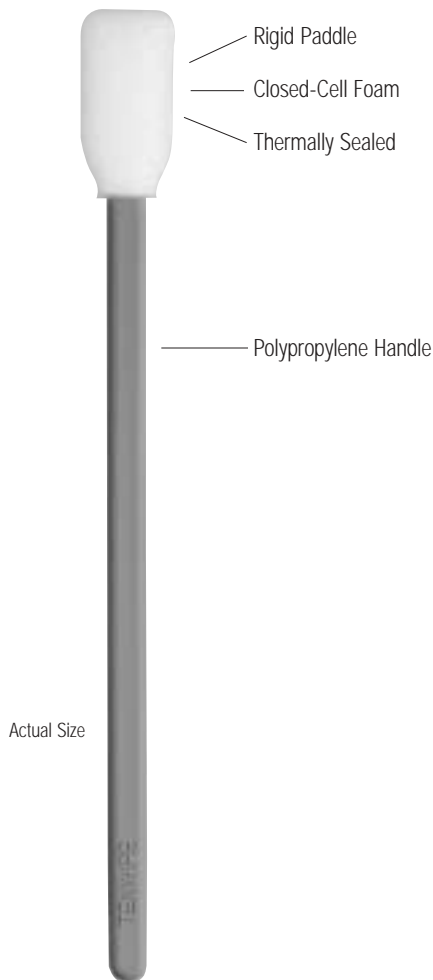

## Description

The Rectangular Head Swab is a large, general-purpose swab for cleaning surfaces and hard-to-reach areas. Its closed-cell polyurethane foam head possesses excellent durability and cushioning. A rigid internal paddle provides firm support. The large polypropylene handle enables good control and ease of use.

## Features

- Polyurethane foam head over rigid paddle
- Closed-cell structure
- Large polypropylene handle
- Thermally sealed head
- Soft and nonabrasive

## Benefits

- Low particle and fiber generation
- Excellent strength
- Good chemical resistance

## Applications

- Cleaning with solvents such as IPA
- Applying lubricants and other liquids
- Removing excess materials
- Scrubbing applications

## Products

TX Number	Description	Packaging
<b>TX712A</b>	Rectangular Head Swab	Bag-Within-A-Bag®; 100 swabs/bag; 2 inner bags of 50 swabs; 10 bags/case

# Rectangular Head Swab

TX712A

## Physical Characteristics

Head material	100 ppi closed-cell polyurethane foam
Head width	12.7 mm (0.500")
Head thickness	7.8 mm (0.307")
Head length	25.7 mm (1.012")
Handle material	Polypropylene
Handle width	5.2 mm (0.205")
Handle thickness	3.0 mm (0.118")
Handle length	101.8 mm (4.008")
Total swab length	127.5 mm (5.020")
Head bond	Thermal
Handle color	Light green
Design notes	Rigid head paddle; long, easy-grip handle

## Contamination Characteristics

Property	Measurement	Test Method*
Nonvolatile residue		
IPA extractant	1.49 mg/swab	TM10: Procedure for Determining the Nonvolatile Residue (NVR) Extractable from Swabs in a Given Solvent
Ions		TM12: The Determination of Ions in Wipers and Other Materials by Capillary Ion Analysis (CIA)
Chloride	0.92 µg/swab	
Sulfate	0.71 µg/swab	
Nitrate	0.78 µg/swab	
Phosphate	0.81 µg/swab	
Fluoride	0.18 µg/swab	
Potassium	0.58 µg/swab	
Calcium	0.22 µg/swab	
Sodium	1.40 µg/swab	
Magnesium	0.08 µg/swab	

\*Test procedures available upon request.

**Distributed by:**  
 All-Spec Industries  
 Wilmington, NC  
[www.all-spec.com](http://www.all-spec.com)

800-537-0351 (phone)  
 800-379-9903 (fax)  
[sales@all-spec.com](mailto:sales@all-spec.com)