

Solaris



Solaris is Luxo's first energy-efficient undercabinet light providing 33% energy savings over conventional products and allowing glare-free illumination for any size or shape workspace. Its sleek design makes it nearly undetectable when mounted to the underside of cabinets or shelves. A glare-eliminating optics system not only provides asymmetric illumination, but allows for stronger, wider light output. Models are individually sized to house T8 fluorescent light sources in a lightweight, easier-to-install and environmentally-friendly aluminum construction. An exclusive cord management system permits versatile mounting in the field.

Solaris provides 33% energy savings over standard undercabinets.



TECHNICAL INFORMATION

- Lamp: 15W, 17W or 25W T8 Fluorescent lamp (included)
- Electrical: Light wired for 120V, 60 Hz operation
- Ballast: HF electronic ballast
- Power Cord: 9 ft. (2743.2 mm)

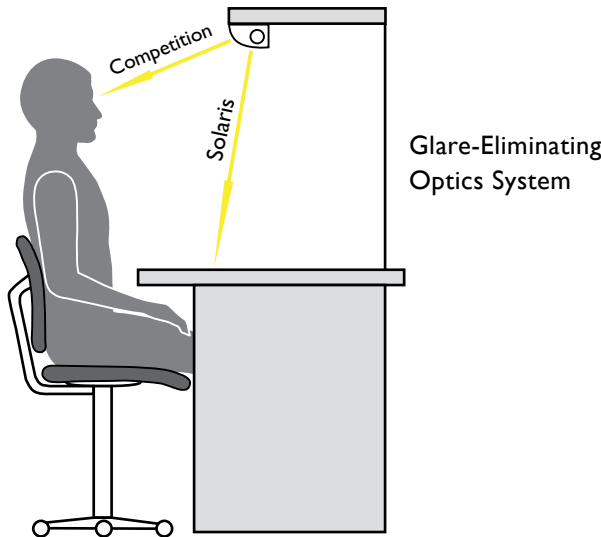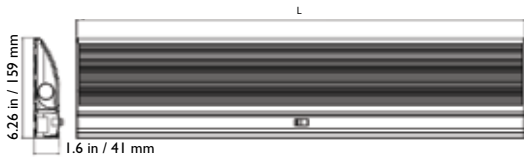

SOLARIS



Cabinet Size	Ordering Code
24 in. (670 mm)	UC-15-18
30 in. (762 mm) 36 in. (914 mm)	UC-17-24
42 in. (1067 mm) 48 in. (1219 mm)	UC-25-36
60 in. (1524 mm) 72 in. (1829 mm)	UC-25-36

CODES

- UC-15-18 15W T8, 18.5" (470 mm)
- UC-17-24 17W T8, 24.5" (622 mm)
- UC-25-36 25W T8, 36.5" (927 mm)

COLORS

- Black (BK)


**Metallic or RAL colors available upon request

ACCESSORIES

- DSTR9 Daisy Chain Starter Unit, 9' cord with 6" connector rail
- DCTR4 Daisy Chain Center Unit, 4' cord with 6" connector rail
- DCTR9 Daisy Chain Center Unit, 9' cord with 6" connector rail
- DEND4 Daisy Chain End Unit, 4' cord
- DEND9 Daisy Chain End Unit, 9' cord
- CC Chicago Code Cord and Plug

Other cord lengths and accessories available upon request.

Daisy Chaining

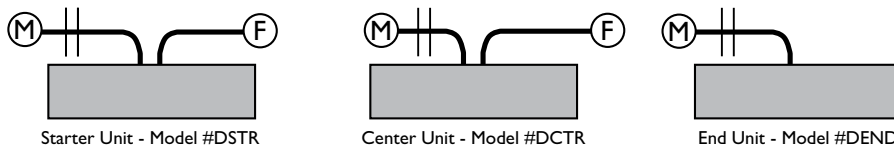

Solaris (UC-17-24)

Source at 18" from worksurface

	-24	-18	-12	-6	CL	6	12	18	24
CL	35	47	69	89	94	88	66	47	36
6	39	52	77	102	110	102	76	52	40
12	39	51	76	105	117	106	79	54	41
18	33	43	62	81	91	81	62	45	37
24	22	30	41	48	54	52	42	31	24