

The HS Series of lights are designed for ease-of-use and engineered to withstand heavy production schedules. The compact head, made of high impact polyamide plastic, allows for unobstructed views of the work area.

Features include:

- Flexible gooseneck or heavy duty articulating arm ideal for small or hard to reach work areas
- Scratch resistant PUR-sleeving protects gooseneck from dust, oils, and moisture
- High intensity 20W halogen bulb offers more than 2,000 hours of projected light
- Available in variety of arm lengths and mounting configurations

***IP65** version available on low voltage models

HS700 - Flexible Gooseneck Light

	Standard	Optional
Power Supply	120V	230V (Euro plug)
Arm Length	20"	12", 27"
Lamp Head	Straight neck	Swivel Joint, Quick Detach, Fixed Right Angle
Lens/Filter	Clear	Frosted, Red, UV, Blue
Base	Direct	Magnetic, C-Clamp, Table, L-bracket
Switch	Rocker switch on base	Button switch on head
Dimmer	No	No
Cord	7' SJT	-
Safety Class (Int'l)	IP20	-
Color	Matte black	Off-white

HS 700 Series Options



Right Angle Head

(-RA) eliminates the need for too sharp a bend of the gooseneck and extends reach.




Right Angle/Swivel Joint Lamphead

(-SJ) provides 360° axial rotation and 90° angular adjustment.



Quick-detach Lamphead

(-QD) permits hand-held use for temporary illumination of hard to reach areas. Coiled cord stretches about 40".

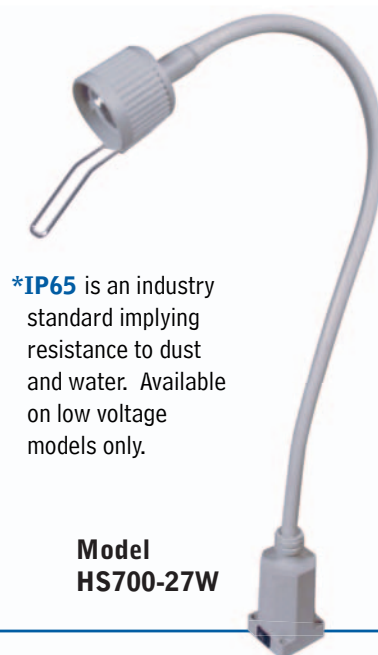

***IP65** is an industry standard implying resistance to dust and water. Available on low voltage models only.

**Model
HS700-27W**



HS710 AAS Heavy Duty (HD) Light

	Standard	Optional
Power supply	110V (plug in transformer)	230V (plug in transformer Euro)
Arm Length	39" two-section	49" three-section
Lamp Head	Swivel joint	-
Lens/Filter	Clear	Frosted, Red, UV, Blue
Base	Direct mount	C-Clamp
Switch	Button switch on head	-
Dimmer	No	No
Cord	7' cord - plug in transformer	-
Safety Class (Int'l)	IP20	-
Color	Nickel plated steel-black joints	-


The HS710 AAS model comes standard with a heavy duty articulating arm that offers extensive reach. This unique arm system keeps the lamp in position - even in the most demanding environments.

Features include:


- Rugged 39"(1000mm) or 49"(1250mm) steel articulating arm for extensive reach
- Adjustable joints for easy positioning
- Heavy-duty, vibration resistant arm ideal for demanding environments

**Model
HS710-49**

**Model
HS710-39**



Switch on Head (-HS) For convenient on/off control, a push button switch can be mounted on the back of the lamphead.



Moisture/Dust Resistant Head (-MR) Two silicone seals prevent accumulation of dust, dirt and moisture inside the reflector and on the light bulb (not available for Right Angle/Swivel Joint Lamphead and Dichroic Reflector Lamps).

HS Series Accessories



Lenses/Filters include clear, frosted and red lenses; UV and blue filters.



Bulbs supplied are 12V/20W halogen. Optional 12V/20W Dichroic Lamps dissipate 60% of heat through back of lamp thus reducing the amount of heat projected forward.



**Model
HS741-20**

HS740 Low Voltage Flexible Gooseneck Light

	Standard	Optional
Power supply	12V	24V
Arm Length	20"	12", 27"
Lamp Head	Straight neck	Swivel Joint, Quick Detach, Fixed Right Angle
Lens/Filter	Clear	Frosted, Red, UV, Blue
Base	Square (HS741)	Rectangular, Panel, Plug-in
Switch	Rocker switch on base	Button switch on head
Dimmer	No	Yes (HS741 only)
Cord	7' SVT P302 plug (HS741, 742)	6" lead wires (HS747)
Safety Class (Int'l)	IP20	IP65
Color	Matte-black	Off-white

These safe, low voltage lights are ideal for industrial machinery, emergency vehicles, medical equipment, and marine applications. Offered in a variety of configurations, this light is the perfect solution for all types of equipment manufacturers.

Features include:

- Safe, low voltage 12V operation (also available in 24V option)
- Rugged, stay-put PUR-sleeved gooseneck
- Compact lamp head ideal for small spaces
- Remote transformer available
- Available with LED bulb option



Transformers Model 410

120V/12V, 25VA, all steel design, zinc plated enclosure, circuit breaker protection, S302 Cinch-Jones socket for P302 lamp cord plug recommended for models 741 and 742.

Model 710-05B

transformer core/coil, 25VA with mounting brackets. For installation in an enclosure.

Electronic 12V/24V Dimmer

(-ED) available for lamps with the square sub-base (Model 741), must be used with Model 610 transformer or 35VA power supply.

HS 740 Base Configurations



Plug-in




Square



Rectangular



Panel

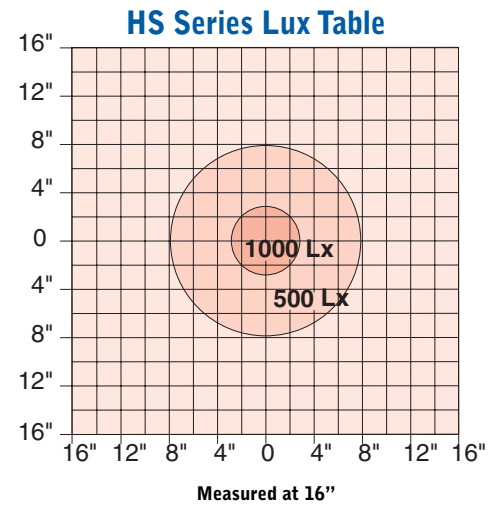

Ideal for applications including:

- Industrial Machinery
- Emergency Vehicles
- Marine
- Medical Equipment
- Assembly and Inspection Areas



All-Spec Industries

www.all-spec.com
sales@all-spec.com

PH: 800-537-0351
 FX: 800-379-9903

HS Series Mounting Options

