


# Tile-Top AM No. 420AM

## ULTIMATE Performance


Offering timeless appeal, exceptional comfort, and performance in heavy use areas, Tile-Top AM far outperforms similar-looking mats. Its nitrile rubber composite sponge base offers unparalleled comfort and performance, and is now anti-microbial. Also designed to inhibit the growth of contaminants, the improved non-porous surface has an extra wear layer for outstanding abrasion and chemical resistance.

**Colors:** White (WH), Tan (TN), Sandalwood (SA), Brown (BN), Black (BK), Blue (BL), Charcoal (CH) and Gray (GY)

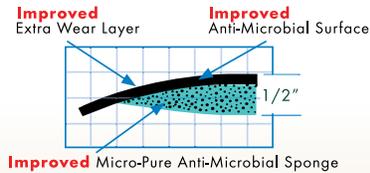

### Tile-Top AM Facts

- 1/2" Overall Thickness
- Wearwell Innovation—1963
- 3 Year Warranty

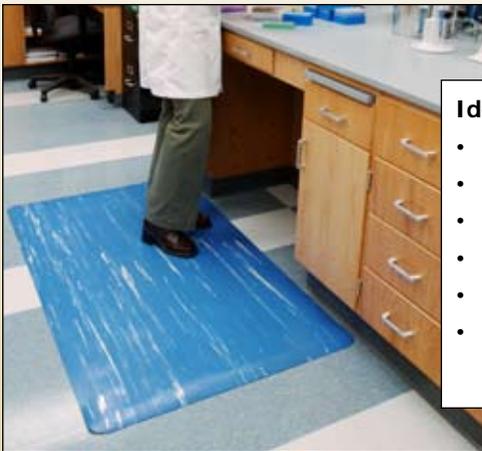

- Ideal for use in:**
- Hospital and healthcare facilities
  - Labs
  - Pharmacies
  - Pharmaceutical manufacturing
  - Shipping and packaging
  - Any dry area where overall comfort and productivity are important



## Tile-Top AM Sizes

Stock Sizes	Non-Stock Sizes
<b>Ship in 1 Business Day</b>	<b>Ship in 2 Business Days</b>
2' x 3'	2' Cut up to 60' in Length
3' x 5'	3' Cut up to 60' in Length
2' x 60'	4' Cut up to 60' in Length
3' x 60'	
4' x 60'	

**C** Unique configurations are available. Some mats may require several sections. Please call for pricing.

Please specify thickness and color when ordering.

### INTENDED USES

Designed for worker comfort in laboratories, pharmaceutical processing and any dry area worker health and safety is important. Its Micro-Pure sponge base is 100% anti-microbial and provides unsurpassed comfort. The attractive marbled vinyl surface is also 100% anti-microbial, extremely durable and offers the benefits of good chemical resistance.

### DETAILS AND COMPOSITION

<b>Compound</b>	1/8" thick vinyl surface bonded to a 3/8" thick Micro-Pure Nitrile composite sponge base.
<b>Edges</b>	<b>Safety beveled.</b> This is a <u>true safety bevel</u> because unlike other manufacturers, we <b>machine bevel</b> the sponge <b>before</b> we adhere it to the Tile-Top AM surface. This process allows the sponge to gradually taper down to the floor. Then the surface is permanently adhered to the sponge so that the mat has no choice but to lay flat.
<b>Thickness</b>	1/2"
<b>Overall Weight</b>	1.2 lbs. per sq.
<b>Stock Sizes</b>	2' x 3' 3' x 5' 2' x 60' 3' x 60' 4' x 60'
<b>Non-stock Sizes</b>	<b>Rolls</b> 2' x 60' 3' x 60' 4' x 60'
	<b>Cut Lengths</b> 2', 3', and 4' widths up to 60' in length
	<b>Custom</b> We frequently customize mats to fit large or unusually shaped areas. 6', 8' and even 12' widths are popular.

### TEST SPECIFICATIONS AND RESULTS

Property	Test	Results
<b>Flammability (surface)</b>	MVSS 302	"A" Rating. It has a flame spread of < 1.6 and is labeled self-extinguishing.
<b>Flammability (sponge)</b>	MIL-P12420C	Burned for < 5 seconds
<b>Coefficient of Friction</b>	ASTM F1677	Dry: COF = .79
<b>Tabor Abrasion</b>	Federal Standard 191 1000g, CS-17 wheel, 1000 revs	.0250g lost (-.4%)
<b>Tensile Strength</b>	ASTM D412	Longitudinal 1000 psi Transverse 1000 psi
<b>Elongation</b>	ASTM D412	Longitudinal 110% Transverse 100%
<b>Tear Strength</b>	ASTM D412	Longitudinal 14.3 lbs. Transverse 9.5 lbs
<b>Density (sponge)</b>	Wearwell Requirements	> 7 lbs./ft <sup>3</sup>
<b>Accelerated Compression</b>	ASTM D395-98	< 20%
<b>Ozone Resistance</b>	ASTM D-1171	Excellent: 7 days no change under 10x magnification
<b>Temperature Range</b>	ASTM D1056	-40 to 130 degrees Fahrenheit

**NOTE:** Tile-Top AM **does not contain latex.**

## CHEMICAL RESISTANCE (SURFACE)

<b>Chemical</b>	<b>Ranking</b>	<b>Chemical</b>	<b>Ranking</b>
Acetic Acid 30%	Fair	Nitric Acid (dilute)	Good
Butyl Alcohol	Fair	Nitric Acid 30%	Great
Carbon Tetrachloride	Fair	Potassium Permanganate (dilute)	Good
Chromic Acid (dilute)	Good	Sodium Perborate	Good
Hydrogen Peroxide (dilute)	Good	Sodium Hydroxide	Fair
Most acids	Good	Sulfuric Acid (dilute)	Great
Most alkalis	Good	Water	Great

**Note:** Please call for additional results, technical assistance or to request a small sample for testing.

## CLEANING RECOMMENDATIONS

Sweep regularly or dry mop the surface. These mats can be wet mopped with mild soap or detergent. For best results use a detergent like Ivory Liquid with a ph between 4.0 – 9.0.

## LIMITED WARRANTY

The materials and workmanship used in the construction of all **Wearwell** SpongeCote mats are guaranteed under normal conditions of usage for **three years** after the date of shipment. If the purchaser discovers a defect in the materials or workmanship of a **Wearwell** SpongeCote mat within three years after the date of shipment, the seller will replace the mat at its own expense. However, if the product is altered or used in a manner for which it was not intended (for example, if the mat is used in a wet or oily area), this warranty is void. There are no warranties, which extend beyond the description on the face thereof.

### **Distributed by:**

**All-Spec Industries**  
Wilmington, NC

Ph: 800-537-0351  
Fx: 800-379-9903

Web: [www.all-spec.com](http://www.all-spec.com)  
Email: [sales@all-spec.com](mailto:sales@all-spec.com)