



Rejuvenator® Connect No. 502

5 YEAR WARRANTY

Performance: **ULTIMATE**

This customizable urethane is the “best of the best.” More comfortable than you can imagine, Wearwell®’s new modular urethane mats connect on all four sides to **accommodate any custom sized area**—even an entire floor. No need for seaming or gluing because these mats snap together and stay together. Why urethane? A perfect combination of extremely **high performance** and **exceptional comfort**, it’s the best long-term value! The robust, abrasion resistant exterior skin totally encapsulates the resilient, crush-resistant urethane sponge interior creating a mat that is virtually indestructible. An elevated square-grid surface creates an appealing symmetrical look for industrial, laboratory, pharmaceutical or commercial environments. Ideal for mostly dry areas, Rejuvenator® Connect is also very resistant to a wide variety of chemicals and fluids, and to a wide range of temperatures. These mats are 3’ x 3’ with an optional 2” wide urethane bevel for safe access. Color: **Black**.

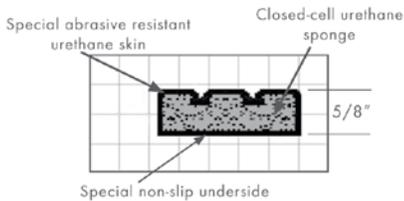


Rejuvenator® Connect can be customized in any size or shape. Size is only limited by weight and shipping restrictions.	Stock Sizes	
	Part Number	Size
	502.58x3x3BK	3’ x 3’
	502.58X2X39FBK	2” x 39”
	502.58X2X39MBK	2” x 39”
	502.58QUOTE	Call for a quote.

2” x 39” Female Ramp snaps over the protruding mat interlocks.

2” x 39” Male Ramp snaps into the underside of the mat.

How Rejuvenator® Connects...

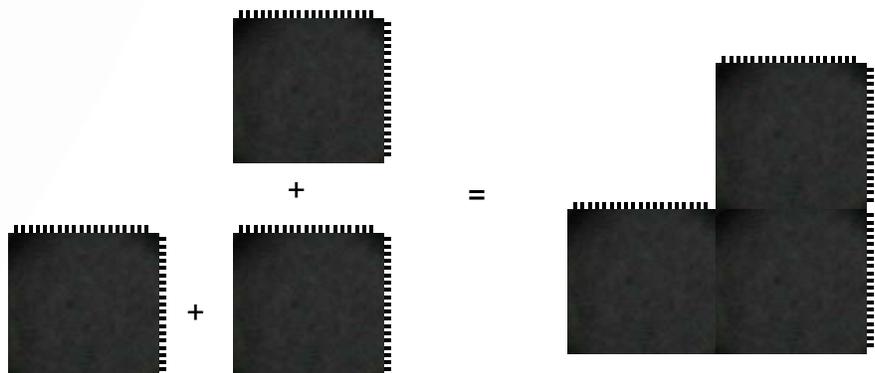

Rejuvenator® Connect No. 502



5 YEAR WARRANTY

Why

URETHANE?

- Urethane is extremely comfortable
- Urethane stays resilient for the life of the product
- Urethane is extremely durable and puncture resistant
- Urethane has exceptional chemical resistance
- Urethane is resistant to the effects of UV rays and to ozone
- Urethane can withstand very low and very high temperatures
- Urethane maintains performance for life of product
- Urethane maintains rebound and comfort
- Urethane has great slip resistance
- Urethane outlasts plastics and rubber
- Urethane can be sterilized in an Autoclave
- Urethane is non-marking
- Urethane is self-extinguishing

Specs

Uses	All dry work areas
Compound	100% Urethane
Compression	.3 inches @ 35 psi per ASTM D575
Coefficient of Friction	.75 Dry per ASTM F1677
Tabor Abrasion	< 1% lost @ 1,000 cycles per Fed Std. 191
Flammability	"A" Rating per MVSS 302
Temperature Range	-50 to 250 degrees F. per ASTM D1056
Edging	Optional
Thickness	5/8"
Color	Black (BK)



All-Spec Industries

www.all-spec.com
sales@all-spec.com

PH: 800-537-0351
 FX: 800-379-9903

Visit us at: www.wearwell.com