

# ALPHA<sup>®</sup> CVP-390

NO-CLEAN, LEAD-FREE SOLDER PASTE ZERO-HALOGEN, LOW VOIDS, FINE FEATURE, EXCELLENT PIN TEST PERFORMANCE, SAC305, SAC405, & LOW AG CAPABLE

## DESCRIPTION

**ALPHA CVP-390** is a lead-free, Zero-halogen no-clean solder paste designed for applications where residue with excellent pin testing property and ability to pass JIS Copper Corrosion test are required.

This product is also designed to enable consistent fine pitch printing capability, down to 180 $\mu$ m circle printed with 100 $\mu$ m thickness stencil. Its excellent print volume deposit repeatability also provides value by reducing defects associated with print process variability. Additionally, **ALPHA CVP-390** achieves IPC7095 Class III voiding performance.

## FEATURES & BENEFITS

- **Long Stencil Life:** consistent performance for at least 8 hours of continuous printing without addition of new paste
- **Long, High Tack Force Life:** ensures high pick-and-place yields, good self-alignment
- **Wide Reflow Profile Window:** allows best quality solderability of complicated, high density PWB assemblies in both air and nitrogen reflow, using ramp and soak profiles, as high as 175 to 185°C
- **Reduced Random Solder Ball Levels:** minimizes rework and increases first time yield
- **Excellent Coalescence and Wetting Performance:** coalesced 180 $\mu$ m circle deposit, even at high soak profile environment
- **Excellent Solder Joint and Flux Residue Cosmetics:** after reflow soldering, even using long/high thermal soaking, without charring or burning
- **Excellent Voiding Performance:** Meets IPC7095 Class III Requirement
- **Halogen Content:** Zero Halogen, no halogen intentionally added
- **Residue:** Excellent Pin Testing property and Pass JIS Copper Corrosion Test
- **Safe and Environmentally Friendly:** Materials comply with RoHS and Halogen-free requirements (see table below), as well as TOSCA & EINECS

## PRODUCT INFORMATION

<u>Alloys:</u>	SAC105, SAC305, SAC405, SACX Plus <sup>™</sup> 0307 SMT, SACX Plus <sup>™</sup> 0807 SMT, Maxrel <sup>™</sup> (Innolot), Maxrel Plus, Sn99.3/Cu0.7, For other alloys, contact your local Alpha Sales Office
<u>Powder Size:</u>	Type 3, Type 4, Type 4.5, Type 5
<u>Packaging Sizes:</u>	500 gram jars, 6" & 12" cartridges
<u>Flux Gel:</u>	Flux gel is available in 10 and 30 cc syringes for rework applications
<u>Lead Free:</u>	Complies with RoHS Directive 2011/65/EC

# ALPHA® CVP-390

NO-CLEAN, LEAD-FREE SOLDER PASTE ZERO-HALOGEN, LOW VOIDS, FINE FEATURE, EXCELLENT PIN TEST PERFORMANCE, SAC305, SAC405, & LOW AG CAPABLE

## APPLICATION

Formulated for both standard and fine pitch stencil printing, at print speeds of between 25mm/sec (1"/sec) and 150mm/sec (6"/sec), with stencil thickness of 0.100mm (0.004") to 0.150mm (0.006"), particularly when used in conjunction with ALPHA Stencils. Blade pressures should be 0.21-0.36 kg/cm of blade (1.25 -1.5 lbs/inch), depending upon the print speed. The higher the print speed employed, the higher the blade pressure that is required. The reflow process window will give high soldering yield with good cosmetics and minimized rework.

## HALOGEN STATUS

ALPHA CVP-390 is a Zero Halogen product and passes the standards listed in the Table below:

Halogen Standards			
Standard	Requirement	Test Method	Status
<b>JEITA ET-7304</b> <i>Definition of Halogen Free Soldering Materials</i>	< 1000 ppm Br, Cl, F in solder material solids	<b>TM EN 14582</b>	Pass
<b>IEC 612249-2-21</b>	Post Soldering Residues contain < 900 ppm each or total of < 1500 ppm Br or Cl from flame retardant source		Pass
<b>JEDEC</b> <i>A Guideline for Defining "Low Halogen" Electronics</i>	Post soldering residues contain < 1000 ppm Br or Cl from flame retardant source		Pass
<b>Zero Halogen:</b> No halogenated compounds have been intentionally added to this product			

# ALPHA® CVP-390

NO-CLEAN, LEAD-FREE SOLDER PASTE ZERO-HALOGEN, LOW VOIDS, FINE FEATURE, EXCELLENT PIN TEST PERFORMANCE, SAC305, SAC405, & LOW AG CAPABLE

## TECHNICAL DATA

CATEGORY	RESULTS	PROCEDURES/REMARKS
<b>CHEMICAL PROPERTIES</b>		
Activity Level	ROLO	IPC J-STD-004B
Halide Content	Halide free (by titration)	IPC J-STD-004B
Fluoride Spot Test	<b>Pass</b>	JIS-Z-3197-1999 8.1.4.2.4
Halogen Test	<b>Pass</b> , Zero Halogen - No halogen intentionally added	EN14582, by oxygen bomb combustion, Non-detectable (ND) at < 50 ppm
Ag Chromate Test	<b>Pass</b>	IPC J-STD-004B
	<b>Pass</b>	JIS-Z-3197-1999 8.1.4.2.3
Copper Mirror Test	<b>Pass</b>	IPC J-STD-004B
	<b>Pass</b>	JIS-Z-3197-1999 8.4.2
Copper Corrosion Test	<b>Pass</b> (No evidence of Corrosion)	IPC J-STD-004B
	<b>Pass</b> (No evidence of Corrosion)	JIS-Z-3197-1999 8.4.1
<b>ELECTRICAL PROPERTIES</b>		
Water Extract Resistivity	13,400 ohm-cm	JIS-Z-3197-1999 8.1.1
SIR (7 days, 40°C/90%RH, 12 V bias)	<b>Pass</b>	IPC J-STD-004B TM-650 2.6.3.7 (Pass ≥ 1 x 10 <sup>8</sup> ohm)
Electromigration (Bellcore 500 hrs @ 65°C/85%RH 10V)	<b>Pass</b>	Bellcore GR78-CORE (Pass=final > initial/10)
JIS Electromigration (1000 hours @ 85°C/85%RH 48V)	<b>Pass</b>	JIS-Z-3197-1999 8.5.4

# ALPHA® CVP-390

NO-CLEAN, LEAD-FREE SOLDER PASTE ZERO-HALOGEN, LOW VOIDS, FINE FEATURE, EXCELLENT PIN TEST PERFORMANCE, SAC305, SAC405, & LOW AG CAPABLE

## PHYSICAL PROPERTIES

CATEGORY	RESULTS	PROCEDURES/ REMARKS
<b>PHYSICAL PROPERTIES</b>		
Color	Clear, Colorless Flux Residue	
Tack Force vs. Humidity	<b>Pass</b> , > 100gf over 24 hours at 25%, 50% and 75 % Relative Humidity	JIS Z-3284-1994, Annex 9
	<b>Pass</b> , Change of <1g/mm <sup>2</sup> over 24 hours at 25% and 75 % Relative Humidity	IPC J-STD-005 TM-650 2.4.44
Tack Force at 32°C/35%RH, measured after 0, 1, 2, 3 & 4 hours print duration	> 100gf	JIS Z-3284-1994, Annex 9
Viscosity	88.8% metal load, Type 4 designated M17 for printing Viscosity (Typical) 1700 poise at 10 RPM Malcom	Malcom Spiral Viscometer; J-STD-005
	89% metal load, Type 4 designated M20 for printing Viscosity (Typical) 2000 poise at 10 RPM Malcom	
	88.8% metal load, Type 4.5 designated M20 for printing Viscosity (Typical) 2000 poise at 10 RPM Malcom	
Viscosity Stability at 25°C for 20 days	Pass	Malcom Spiral Viscometer
Continuous Viscosity Measurement at 25°C for 24 hours	Pass	Malcom Spiral Viscometer
Coalescence Test	Able to reflow at < 200 µm Cu pad circle size	Internal
Solder Ball	Preferred	IPC J-STD-005 TM-650 2.4.43
Wetting Time	Pass 0.34 second	Rhesca Test, Test Time T2, 3 seconds
Spread	80%	JIS-Z-3197-1999 8.3.1.1
Stencil Life	>8 hours	@ 50% RH 23°C (74°C)
Cold Slump	No bridge for 0.2 mm space	JIS-Z-3284-1994 Annex 7
	Not tested	IPC J-STD-005 TM-650 2.4.35
Hot Slump	No bridge for 0.4 mm space	JIS-Z-3284-1994 Annex 8
	Pass	IPC J-STD-005 TM-650 2.4.35
Dryness Test (Talc)	Pass	JIS-Z-3197-1999 8.5.1

# ALPHA® CVP-390

NO-CLEAN, LEAD-FREE SOLDER PASTE ZERO-HALOGEN, LOW VOIDS, FINE FEATURE, EXCELLENT PIN TEST PERFORMANCE, SAC305, SAC405, & LOW AG CAPABLE

## SAFETY


While the **ALPHA CVP-390** flux system is not considered toxic, its use in typical reflow will generate a small amount of reaction and decomposition vapors. These vapors should be adequately exhausted from the work area. Consult the SDS (available at [www.AlphaAssembly.com](http://www.AlphaAssembly.com)) for all safety information.

STORAGE & HANDLING	PRINTING	REFLOW (see Fig. 1)	CLEANING
<p>1. Refrigerate to guarantee stability @ 0-10°C (32-50°F). When stored under these conditions, the shelf life of CVP-390 is 6 months.</p> <p>2. Paste can be stored for 4 weeks at room temperature up to 25°C(77°F) prior to use</p> <p>3. When refrigerated, warm up paste container to room temperature for up to 4 hours. Paste must be 19°C (66°F) before processing. Verify paste temperature with a thermometer to ensure paste is at 19°C (66°F) or greater before set up of printer.</p> <p>4. Paste can be manually stirred before use. A rotating/Centrifugal force mixing operation is not required. If a rotating/centrifugal force mixing is used, 30 - 60 seconds at 300 RPM is adequate.</p> <p>5. Do not remove worked paste from stencil and mix with unused paste in jar. This will alter the rheology of unused paste.</p> <p>6. These are starting recommendations and all process settings should be reviewed independently.</p>	<p><b>STENCIL:</b> Recommend ALPHA CUT, ALPHA NICKEL-CUT, ALPHA TETRABOND®, or ALPHA FORM stencils @ 0.100mm - 0.150 mm (4-6 mil) thick for 0.4 - 0.5 mm (0.016" or 0.020") pitch. Stencil design is subject to many process variables. Contact your local Alpha stencil site for advice.</p> <p><b>SQUEEGEE:</b> Metal (recommended)</p> <p><b>PRESSURE:</b> 0.21 - 0.36 kg/cm of blade (1.25 -2.0 lbs/inch)</p> <p><b>SPEED:</b> 25 – 150 mm per second (1 – 6 inches per second).</p> <p><b>PASTE ROLL:</b> 1.5-2.0 cm diameter and make additions when roll reaches 1-cm (0.4") diameter (min). Max roll size will depend upon blade.</p> <p><b>STENCIL RELEASE SPEED:</b> 1 – 5 mm/sec.</p> <p><b>LIFT HEIGHT:</b> 8 – 14mm (0.31- 0.55")</p>	<p><b>ATMOSPHERE:</b> Clean-dry air or nitrogen atmosphere.</p> <p><b>PROFILE (SAC Alloys):</b> <b>Straight Ramp:</b> 0.7°C/sec &amp; 1.3°C/sec ramp profiles, 45 - 90 TAL.</p> <p><b>Soak:</b> 155–175 °C, 60 to 100 sec soak profiles have been determined to give optimal results. If required, good results are also achievable with high soak temperature profiles of 17 –185°C for 60 s. Typical peak temperature is 235 to 245°C.</p> <p><b>Note 1:</b> Keeping the peak temperature below 241°C may reduce the number and size of BGA and QFN voids.</p> <p><b>Note 2:</b> Refer to component and board supplier data for thermal properties at elevated temperatures. Lower peak temperatures require longer TAL for improved joint cosmetics.</p>	<p>ALPHA CVP-390 residue is designed to remain on the board after reflow. If reflowed residue cleaning is required, Vigon® A201 (in line cleaning), Vigon A 250 (Batch Cleaning) or Vigon US (Ultrasonic Cleaning) are recommended. Vigon is a registered trademark of Zestron.</p> <p>Misprints and stencil cleaning may be done with IPA, ALPHA SM-110E, ALPHA SM-440, and Bioact® SC-10E cleaners. Bioact is a registered trademark of Petroferm.</p>

# ALPHA® CVP-390

NO-CLEAN, LEAD-FREE SOLDER PASTE ZERO-HALOGEN, LOW VOIDS, FINE FEATURE, EXCELLENT PIN TEST PERFORMANCE, SAC305, SAC405, & LOW AG CAPABLE

**Fig 1: ALPHA CVP-390 SAC305 Typical Reflow Profile**

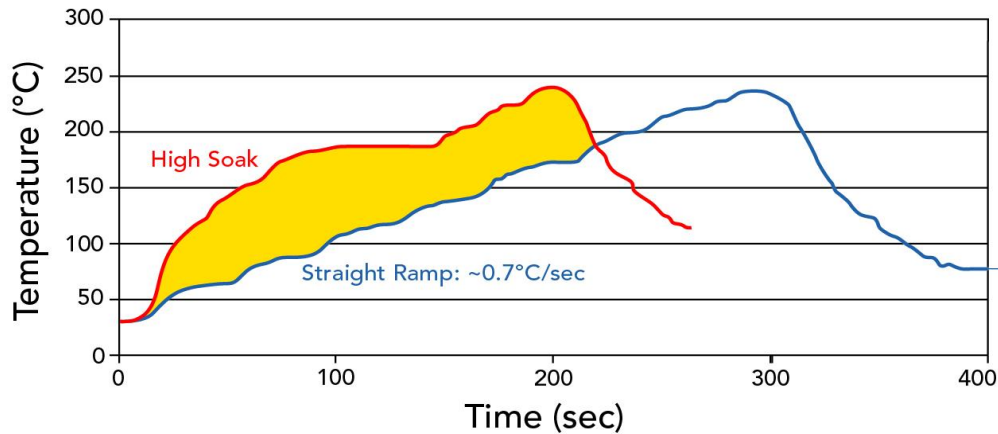

Parameter	Guideline	Additional Information
Atmosphere	Air or N2	
SAC305	217 - 221°C Melting Range	
SACX Plus™ 0807 SMT	217 - 225°C Melting Range	
SACX Plus™ 0307 SMT	217 - 227°C Melting Range	
Setting Zone*	Optimal Dwell Period	Extended window
40°C to 221°C	2:30 to 4:30 min.	< 5:00 min.
170°C to 221°C	0:30 to 2:00 min	< 2:30 min.
120°C to 221°C	1:25 to 3:00 min.	< 3:30 min.
TAL (217 - 221°C)	45 - 90 sec.	Not Recommended
Peak temperature	235 - 245°C	Compatible with most common surface finishes. (Entek HT, Entek OM, Alpha Star, ENIG, SACX® HASL). Coldest point on the PCB can be as low as 230°C. Paste can withstand 250°C during reflow.
Joint cool down rate	1 - 6°C/second	Recommended to prevent surface cracking issues.

Above recommendations are for SAC305.  
For alternative alloys, please follow the liquidus temperature of the respective alloy

# ALPHA® CVP-390

NO-CLEAN, LEAD-FREE SOLDER PASTE ZERO-HALOGEN, LOW VOIDS, FINE FEATURE, EXCELLENT PIN TEST PERFORMANCE, SAC305, SAC405, & LOW AG CAPABLE

## CONTACT INFORMATION

To confirm this is the most recent issue, please contact Alpha Assembly Solutions

[www.AlphaAssembly.com](http://www.AlphaAssembly.com)

<p><b>North America</b> 300 Atrium Drive Somerset, NJ 08873, USA 800.367.5460</p>	<p><b>Europe</b> Unit 2, Genesis Business Park Albert Drive Woking, Surrey, GU21 5RW, UK 01483.758400</p>	<p><b>Asia</b> 8/F., Paul Y. Centre 51 Hung To Road Kwun Tong, Kowloon, Hong Kong 852.3190.3100</p>
---	---	---

Also read carefully warning and safety information on the Safety Data Sheet. This data sheet contains technical information required for safe and economical operation of this product. READ IT THOROUGHLY PRIOR TO PRODUCT USE. Emergency directory assistance Chemtrec 1 - 800 - 424 - 9300.

DISCLAIMER: All statements, technical information and recommendations contained herein are based on tests we believe to be reliable, but the accuracy or completeness thereof is not guaranteed. No statement or recommendation shall constitute a representation unless set forth in an agreement signed by officers of seller and manufacturer. NO WARRANTY OR MERCHANTABILITY OR WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE IS MADE. The following warranty is made in lieu of such warranties and all other warranties, express, implied, or statutory. Products are warranted to be free from defects in material and workmanship at the time sold. The sole obligation of seller and manufacturer under this warranty shall be to replace any product defective at the time sold. Under no circumstances shall manufacturer or seller be liable for any loss, damage or expense, direct or consequential, arising out of the inability to use the product. Notwithstanding the foregoing, if products are supplied in response to a customer request that specifies operating parameters beyond those stated above, or if products are used under conditions exceeding said parameters, the customer by acceptance or use thereof assumes all risk of product failure and of all direct, indirect and consequential damages that may result from use of the products under conditions, and agrees to exonerate, indemnify and hold harmless MacDermid Incorporated therefrom. No suggestion for product use nor anything contained herein shall be construed as a recommendation to use any product in infringement of any patent rights, and seller and manufacturer assume no responsibility or liability for any such infringement.

© Registered Trademark of MacDermid Performance Solutions. ™ Trademark of MacDermid Performance Solutions.  
© Platform Specialty Products Corporation and its subsidiaries 2016.