

# Trident 287

## DESCRIPTION AND GENERAL PROPERTIES

- **Material** Natural latex
- **Length (inches)** 23"
- **Thickness (inches)** 0.035" (35 mil)
- **Wrist** Rolled cuff
- **Colour/Color** Black
- **Interior finish** Smooth chlorinated
- **Exterior finish** Smooth
- **Size / EAN** 9 10 11
- **Packaging** 1 pair/bag - 12 pairs/box
- **Complementary information** Guaranteed Silicone Free



## PERFORMANCE RESULTS

### Certification category



ABKL




2131

### Legends



**MECHANICAL HAZARDS EN 388**

PERFORMANCE LEVELS



**LOW CHEMICAL PROTECTION EN 374**



**MICRO-ORGANISMS EN 374**



**RADIOACTIVE CONTAMINATION EN 421**




**SPECIFIC CHEMICAL PROTECTION EN 374**

Letter Code	Chemical product
A	Methanol
B	Acetone
C	Acetonitrile
D	Dichloromethane
E	Carbon Disulfide
F	Toluene
G	Diethylamine
H	Tetrahydrofurane
I	Ethyl acetate
J	n-Heptane
K	Sodium hydroxide 40%
L	Sulphuric acid 96%




**COLD HAZARDS EN 511**

PERFORMANCE LEVELS



**HEAT AND FIRE EN 407**

PERFORMANCE LEVELS

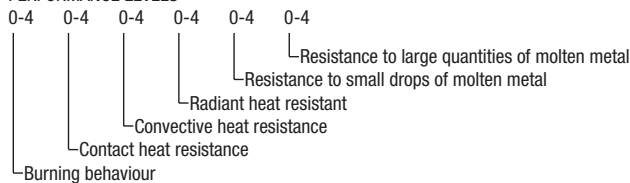

For more details: [www.mapa-pro.com](http://www.mapa-pro.com)

**MAPA**<sup>®</sup>  
**PROFESSIONAL**

[www.mapa-pro.com](http://www.mapa-pro.com)

## SPECIFIC ADVANTAGES

- Provides protection against Acids and Alkalies/Bases

## MAIN FIELDS OF USE

### Chemical industry

- Chemical product blending
- Cleaning tanks

### Other industries

- Application of pesticides
- Spreading fertilizer

## INSTRUCTIONS FOR USE

### Instructions for use

- It is recommended to check that the gloves are suitable for the intended use, because the conditions of use at the workplace may differ from the "CE"-type tests.
- It is not recommended for persons sensitised to natural latex, dithiocarbamates and thiazoles to use these gloves.
- Put the gloves on dry, clean hands.
- Do not use the gloves in contact with a chemical for a duration in excess of the measured breakthrough time. Refer to the website [www.mapa-pro.com](http://www.mapa-pro.com) or contact the Technical Customer Service - MAPA PROFESSIONNEL ([stc.mapaspontex@mapaspontex.fr](mailto:stc.mapaspontex@mapaspontex.fr)) in order to know this breakthrough time. Use 2 pairs alternatively when in long duration contact with a solvent.
- Turn the cuff end down in order to prevent a hazardous chemical from dripping onto the arm.
- Inspect the gloves for cracks or snags before reusing them.

### Storage conditions

- Store the gloves in their original packaging protected from direct sunlight, far from heat sources or electric equipment.

### Laundering conditions

- Before taking off the gloves, clean them as appropriate :
- in use with a solvent (alcohol, etc...) : rub over with a dry cloth
- in use with detergents, acids or alkalies : thoroughly rinse the gloves under running water, and rub over with a dry cloth
- Caution : improper use of the gloves or submitting them to a cleaning or laundering process, which is not specifically recommended, can alter their performance levels.

### Drying conditions

- Ensure the inside of the gloves is dry before putting them on again.

### Food contact US

- FDA 21CFR 177.2600

## LEGISLATION

This product is not classified as hazardous according to the directive 1999/45/EC of the European Parliament and of the Council.

- This product does not contain any substances of very high concern according to the regulation n° 1907/2006 of the European Parliament and of the Council (REACH).