

StanSolv AF-18

DESCRIPTION AND GENERAL PROPERTIES

Material Nitrile
 Length (inches) 13"
 Thickness (inches) .018 (18 mil)
 Wrist Straight cuff
 Colour/Color Green
 Interior finish Flocked
 Exterior finish Embossed texture
 Size / EAN 6 7 8 9 10 11
 Packaging 12 pairs/bag - 72 pairs/carton



PERFORMANCE RESULTS

Certification category 3

CE 0334




JKL

4101

Legends



MECHANICAL HAZARDS EN 388



LOW CHEMICAL PROTECTION EN 374



MICRO-ORGANISMS EN 374



RADIOACTIVE CONTAMINATION EN 421




SPECIFIC CHEMICAL PROTECTION EN 374


Letter Code	Chemical product
A	Methanol
B	Acetone
C	Acetonitrile
D	Dichloromethane
E	Carbon Disulfide
F	Toluene
G	Diethylamine
H	Tetrahydrofurane
I	Ethyl acetate
J	n-Heptane
K	Sodium hydroxide 40%
L	Sulphuric acid 96%



COLD HAZARDS EN 511



HEAT AND FIRE EN 407

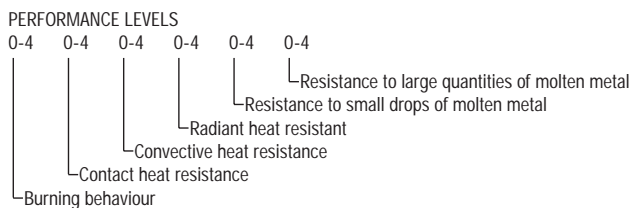

For more details: www.mapa-pro.com

MAPA[®]
PROFESSIONAL

www.mapa-pro.com

SPECIFIC ADVANTAGES

Excellent dexterity, due to the suppleness of the glove
Flock lining offers added comfort and absorbs perspiration during extended wear
Unique Z-pattern grip provides an excellent grip, even on hard-to-grasp materials.

MAIN FIELDS OF USE

Automotive/mechanical industry

Assembly of small oily parts
Assembly of small, oil and grease free parts

Chemical industry

Common handling Tasks
Handling and transporting chemicals (solvents)

INSTRUCTIONS FOR USE

Instructions for use

It is recommended to check that the gloves are suitable for the intended use, because the conditions of use at workplace may differ from the "CE"-type tests.

Persons sensitized to dithiocarbamates and thiazoles should not use these gloves.

Put the gloves on dry, clean hands.

Do not use the gloves in contact with a chemical for a duration in excess of the measured breakthrough time. Refer to the website www.mapa-pro.com or contact the Technical Customer Service - MAPA PROFESSIONNEL (stc.mapaspontex@mapaspontex.fr) in order to know this breakthrough time. Use 2 pairs alternatively when in long duration contact with a solvent.

Turn the cuff end down in order to prevent a hazardous chemical from dripping onto the arm.

Inspect the gloves for cracks or snags before reusing them.

Storage conditions

Store the gloves in their original packaging protected from light, humidity and heat.

Laundering conditions

Before taking off the gloves, clean them as appropriate :

in use with paints, pigments and inks : wipe with a clean cloth dampened with a suitable solvent, and rub over with a dry cloth

in use with a solvent (alcohols, diluents, etc.) : rub over with a dry cloth

in use with acids or alkalies : thoroughly rinse the gloves in use with under running water, and rub over with a dry cloth

Caution : improper use of the gloves or submitting them to any cleaning or laundering process which is not specifically recommended can alter their performance levels.

Drying conditions

Ensure the inside of the gloves is dry before putting them on again.

Food contact US

FDA 21CFR 177.2600

LEGISLATION

This product is not classified as hazardous according to the directive 1999/45/EC of the European Parliament and of the Council.

This product does not contain any substances of very high concern according to the regulation n° 1907/2006 of the European Parliament and of the Council (REACH).

UE type certificate or CE type examination certificate : 0072/014/162/04/06/0029

Issued by the notified body nr : 0072

I.F.T.H. – Av. Guy de Collongue - F-69134 ECULLY CEDEX