

**TECHNICAL DATA** 

# Fluke PM9091/001 50 Ohm Coaxial BNC cable set (3 x 1.5m)



## **Key features**


- Cable length is 1.5 m
- Maximum Signal Voltage: 300 V rms
- Maximum Voltage to Ground: 600 V rms. CAT III per IEC 61010-031
- BB120 Shielded Banana to BNC Adapter is required to adapt to ScopeMeter 120 Series shielded banana jack inputs

## Product overview: Fluke PM9091/001 50 Ohm Coaxial BNC cable set (3 x 1.5m)

Each set consists of three black cables with colored BNC male connectors (red, gray and black) for easy identification.



### **Ordering information**

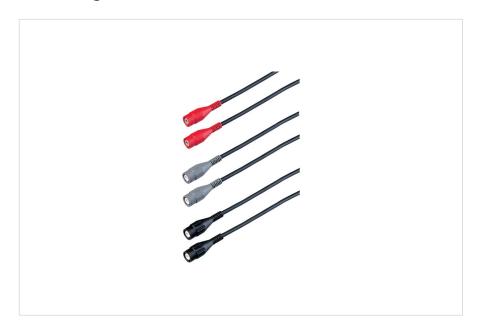

#### Fluke PM9091

50 Ohm Coaxial BNC cable set (3 x 1.5m)



#### Fluke. Keeping your world up and running.®

**Fluke Corporation** PO Box 9090, Everett, WA 98206 U.S.A.

For more information call:

In the U.S.A. (800) 443-5853 In Canada (800) 36-FLUKE From other countries +1 (425) 446-5500 www.fluke.com ©2022 Fluke Corporation. Specifications subject to change without notice. 11/2022

Modification of this document is not permitted without written permission from Fluke Corporation.