



Made in the
United States of America




- A. Brass machined hex block with banana plug and 6 banana jacks (.162" - .164" ± .002" ID) and 6 screw terminals for #8 ring terminals.
- B. Banana Jack (0.162" - 0.164" ± 0.002" ID) Outlet Adapter
- C. 6' long, high flex strand copper, 20 gauge, with PVC insulated jacket. Green/yellow wire terminated with a .200" I.D. #10 ring terminal.
- D. Six 10-32 x 1/4" socket head screws.
- E. Six #10 split washers.
- F. 10-32 x 1-3/4" socket head screw.
- G. 10-32 hex nut.
- H. One #10 split washer.
- I. Ring terminal
- J. Hex Key

COMMON POINT GROUND

Per ANSI/EOS/ESD S6.1, Grounding paragraph 4.1.1 "Every element to be grounded at an ESD protected station shall be connected to the same common point ground."

ESD Handbook TR 20.20 paragraph 5.1.3 Basic Grounding Requirements "The first step in ensuring that everything in an EPA is at the same electrical potential is to ground all conductive components of the work area (worksurfaces, people, equipment, etc.) to the same electrical ground point. This point is called the common point ground. The next step in completing the ground circuit is to connect the common point ground to the equipment ground (third wire, green)."

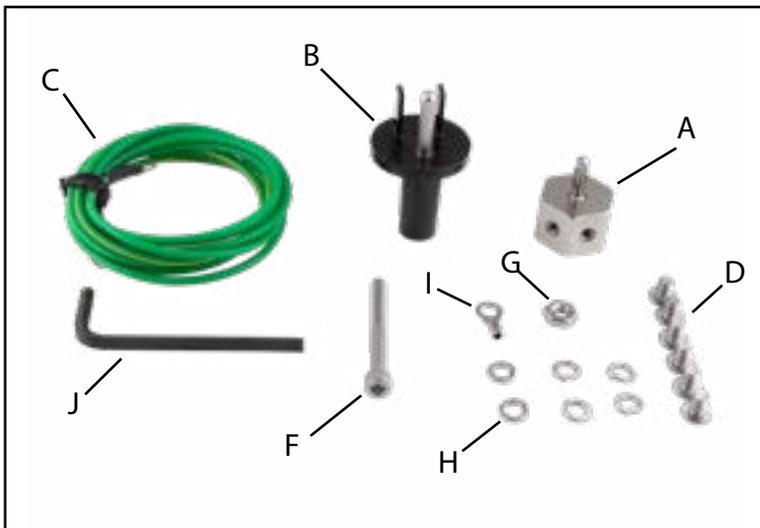

ITEM	DESCRIPTION
770144	Hub Master

Dimensional Tolerances: ± 5%

Specifications and procedures subject to change without notice.

HUB MASTER			
926 JR Industrial Drive, Sanford, NC 27332 WEB SITE: StaticControl.com PHONE (919) 718-0000	DRAWING NUMBER 770144	DATE February 2024	

SCS