


VIGON SC 200



Water-based stencil cleaner for the removal of solder pastes and SMT adhesives

VIGON® SC 200 is a water-based cleaning agent designed to clean SMT stencils at room temperature. Based on the MPC® Technology, the cleaning agent reliably removes solder pastes and SMT adhesives in one single process and can also be used for stencil underside wiping in printers. It is designed for the use in spray-in-air and ultrasonic cleaning systems and is also recommended for cleaning misprinted solder paste. Depending on the type of fluxes, VIGON® SC 200 can also be used for misprints on double-sided PCBAs with one side already soldered.

Areas of application - Stencil & Misprint Cleaning

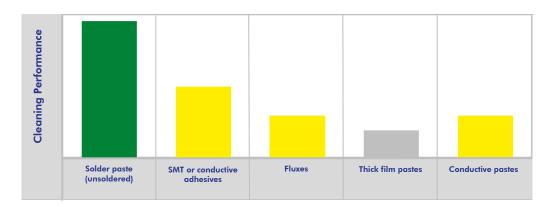



Advantages compared to other cleaners

- High bath loading capability, very good filterability and therefore a long bath life as well as low maintenance costs.
- Due to its mild formulation, the medium shows excellent material compatibility with stencils.
- Applicable in spray-in-air systems, ultrasonic dip tanks and printers.
- Recommended for ambient cleaning temperatures.
- Water-based cleaner without flash point, no explosion-proof protection required.
- Applicable in closed-loop systems.
- No foaming when used in spray-in-air systems, low odor, no building of organics in the rinsing section.
- VIGON® SC 200 has been approved by leading international manufacturers for the use in their stencil printers. Written approvals can be obtained from ZESTRON.

Process Steps

Cleaning Process	1. Cleaning	2. Rinsing	3. Drying
Spray-in-air	VIGON® SC 200	VIGON® SC 200, water or DI-water ¹	Hot air or circulating air
Ultrasonic	VIGON® SC 200	VIGON® SC 200, water or DI-water ¹	Hot air or circulating air
SMT printer	VIGON® SC 200	not applicable	vacuum drying

¹ Depending on the water hardness, rinsing with regular water might be sufficient for stencil cleaning. In the case of high water hardness, lime marks may stay behind. For misprint cleaning, rinsing with DI-water is highly recommended.



Independent Test Center - Largest choice of leading machines, chemistry & analytics





Visit our Machine Test Center and clean your stencils & screens under production conditions in cleaning machines of leading international equipment suppliers. Our process engineers will help you independently of any supplier to find the most suitable combination of equipment & cleaning agent for your requirements. Following the cleaning trials, all results will be reviewed immediately in our Analytical Center to verify the required cleanliness.

Contact ZESTRON's process engineers for cleaning trials:

Europe: +49 8453 41995 318; techsupport@zestron.com / South Asia: +604 (3996) 100; support@zestronasia.com

Technical Data*

Density	(g/ccm) at 20°C/68°F	0.99
Surface tension	(mN/m) at 25°C/77°F	29.7
Boiling range	°C/°F	95 – 212 / 203 – 414
Flash point	°C/°F	None until boiling
pH value	10g/l H ₂ O	Neutral
Vapor pressure	(mbar) at 20°C/68°F	18.1
Cleaning temperature	°C/°F	20 – 50 / 68 – 122
Solubility in water		Soluble
Application concentration	Ready-to-use	Pure
Application concentration ¹	Concentrate	25 %
HMIS Rating	Health-Flammability-Reactivity	0 - 0 - 0

^{*} VIGON® SC 200 is available as concentrate or ready-to-use-solution. The following information represents a ready-to-use-mixture.

Product Features & Cleaning Standards



100% compliance with EU guidelines (RoHS 1, 2 & 3, WEEE)



Extensively tested and suitable for cleaning lead-free solder pastes



MPC® Technology ensures an extremely long bath life when used in a closed loop system



Product is free of any critical substances according to SIN & SVHC lists

Stencils cleaned with VIGON® SC 200 in a ZESTRON specified process meet the following industry standards:

IPC-7526 Manual for cleaning of stencils and misprinted boards

 $^{^1\,\}text{VIGON}^{\tiny{(8)}}\,\text{SC}$ 200 is recommended to be diluted in DI-water.

Technical Information



Environmental, health & safety regulations

- VIGON® SC 200 is formulated free of any halogenated compounds and biodegradable.
- Rinsing with water is not necessary. This results in the elimination of water streams and water treatment processes.
- Refer to the SDS for specific handling precautions and instructions.
- VIGON® SC 200 is a non-hazardous material and according to EU standards does not require specific labelling.

Availability & Storage

1 Liter	✓
5 Liter	✓
25 Liter	✓
200 Liter	✓

- Available as concentrate and ready-to-use solution
- Store VIGON® SC 200 in the original container at a temperature between 5 - 30°C / 41 - 86°F.
- The product has a minimum shelf life of 5 years in factory sealed containers.



Further product information

Material Compatibility

Please review the Material Compatibility overview before using the cleaning agent.

Evaluation guideline

Guideline for stencil underside wiping in SMT printers.

Process reliability

Additional information about underside cleaning in SMT printers.

MPC® Technology Sheet

Detailed information on MPC® Technology.

Filter recommendation

To take full advantage of MPC® Technology and further extend the bath life of VIGON® SC 200, filtration is recommended.

Safety data sheet

Available Process-Optimization-Products

To ensure a stable running cleaning process, it is important to monitor cleaning agent concentration and regular bath treatment. For VIGON® SC 200 a variety of process support products is available:



Concentration measurement:

- ZESTRON® EYE for automated real-time concentration monitoring providing 100% traceability.
- ZESTRON® Bath Analyzer 20, a manual test method for fast and reliable checks on cleaner concentration.