

## 4010 Anti-Static Floor Stripper

### DUAL SYNERGIZED SYSTEM!



Staticide 4010 Anti-Static Floor Stripper removes multiple coats of wax and synthetic floor finishes quickly and efficiently while lifting embedded dirt in the floor. This special formula emulsifies dirt and residual particles of old wax so that preparation is quick and easy. Floors are left with a clean surface that is ready to wax.

The Staticide Anti-Static Floor Stripper will not damage or dull flooring when used according to manufacturer's recommendations.

### FEATURES

- ✿ Economical concentrate: 1:4 dilution ratio (stripper to water)
- ✿ Coverage is approximately 5000 sq. ft per gallon
- ✿ Effective in hard or soft water
- ✿ Contains no acid or ammonia
- ✿ Low VOC
- ✿ Zero tribogeneration
- ✿ Biodegradable
- ✿ Non-Toxic

#### Available in:

4010-1 (1 gallon bottle)  
4 per case

4010-5 (5 gallon pail)


4010-2 (54 gallon drum)



ACL Incorporated registered to  
ISO 9001:2008  
Certificate NO. 10002746

## PHYSICAL PROPERTIES

% Solids	5.0
pH	8 - 9
Density@25°C	8.5 lbs/gallon
Color	Red
Electrostatic Decay time (FED test method 4046)	.2 seconds

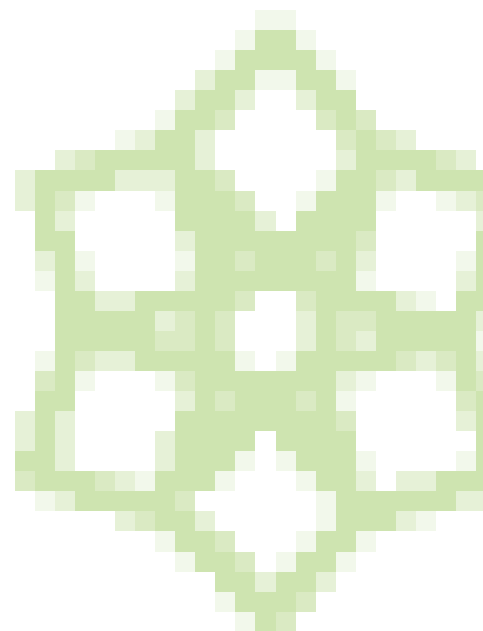

## LABEL SAFETY INFORMATION

Causes severe burns. Keep out of reach of children. In case of contact with eyes, rinse immediately with plenty of water and seek medical advice. Take all contaminated clothing off immediately. Wear suitable gloves and eye/face protection. In case of accident if you feel unwell, seek medical advice immediately (show label where possible).

## APPLICATION

1. Dilute 250 ml stripper in 1 liter of water
2. Mop diluted stripper on floor and reapply as required to keep floor wet for 10 – 15 minutes
3. Scrub floor with abrasive pad to loosen all old finish and dirt
4. Rinse floor thoroughly with water
5. Pick up with wet vacuum or mop
6. Repeat as necessary to completely flush stripper and dry thoroughly before application of floor finish.



ACL Incorporated registered to  
ISO 9001:2008  
Certificate NO. 10002746