### **Transforming Technologies**

# AC Overhead Ionizing Blower

## **Overhead** Excellence

The BFN 803, 3 fan overhead ionizing blower, with AC technology, provides excellent balance and stability for secure workstation protection. This superior ionizer is equipped with 2 task lights, integrated emitter cleaners and safe, easy maintenance access.

## **Complete Workstation Protection**

BFN series AC ionizers from Transforming Technologies create a dense and well-balanced ionization current. They are unique in their ability to deliver fast decay times with low offset voltages. Continuous balance and decay protection is assured by the reliable AC design. An integrated emitter point cleaner, removable front and rear fan guards, safety switch combine to make the BFN 803 a user friendly ionizer.



Removable fan plate with safety switch and point cleaner.

### Features

- AC ionization output
- 2 Task Lights
- Integrated emitter cleaning device
- Variable fan speed control
- Removable finger guards with auto shut-off sensor

## Benefits

- <u>+</u>10 volt balance; Assured stability over time
- Enhances operator efficiency
- Keeps emitters free from contamination
- Adjustable for varied work applications
- Easy to clean and safe to access

# Model BFN 803

AC Overhead Ionizer



Transforming Technologies,

tstanding Alternatives in Static Control

# **BFN 803 Overhead Blower**

## **Product Specifications**

#### **Power Requirements**

120 V AC, 60 Hz., 110W 220 V AC, 50Hz.

#### Dimensions

38.78" W x 6.75" H x 3.35" D (58.5 W x 17.2 H x 8.5 D cm) Weight

18.7 lb (8.5 kg)

### Air Volume

150 CFM – 300 CFM [low –high] Effective Coverage

## 2' x 4' area coverage

Balance

## 0 <u>+</u>10 volts

Decay Time
< 3 seconds @ 18", directly
under center of unit, 1000V100V,</pre>

fan speed on high Temperature

32-122° F (0-50° C)

Ozone Production < 0.003 ppm, 12" in front of unit, EPA EQOA577019 RH Operating Range

20-60%, non-condensing

Discharge time in seconds (1000 volts to 100volts) determined per EOS/ESD Association Standard NO.3; unit at 18" above test plate, fans at high speed. Discharge times are slightly loner for 230VAC, 50Hz unit.


#### Indicators

ON/OFF status light indicator, detects presence of HV on emitter points **Light Output** 1650 Lumens **Light Color Temperature** 2500 K **Replacement Lamp** T4/5W fluorescent lamp

#### **Audible Noise**

52dB(A), (Distance 1 meter) Enclosure Steel Finish Powder coat, off white Approvals CE

## **BFN 803 Performance**

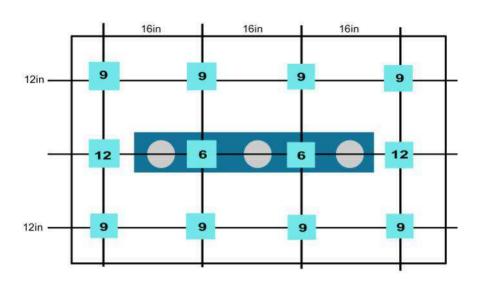

Tested in accord with ANSI/ESD STM3.1-2006

#### About Transforming Technologies

Transforming Technologies offers a wide range of unique and outstanding products to detect, protect, eliminate and monitor electrostatic charges. Our products are integral components of an effective static control program.

This document is prepared for our customers as a service, and is to the best of our knowledge true and accurate. However, it is understood and agreed by the users of this document that we will accept no liability for the conclusions reached. Users of this document may therefore wish to perform additional testing before determining that products mentioned are suitable.



Transforming Technologies, LLC

3719 King Road. Toledo, OH 43617

Phone: 1.419.841.9552 Fax: 1.419.841.3241 www.transforming- technologies.com

Outstanding Alternatives in Static Control